## **SPECIFICATIONS**

FOR TOPLITE COB MODULE

**MODEL: ATE-R10** 



## TOPLITE INTERNATIONAL LLC.


www.topliteusa.com

http://www.topliteusa.com Email:sales@toplightusa.com


## TECHNICAL DATA SHEET ATE-R10 <FOR TOPLITE COB MODULE>


1/9

## 1. PRODUCT APPEARANCE

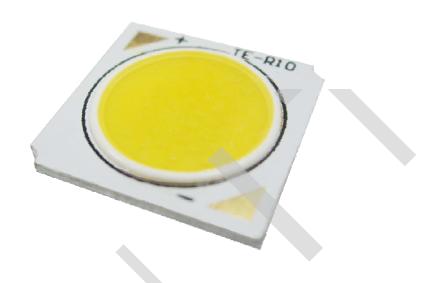

## 2. OUTLINE DRAWING

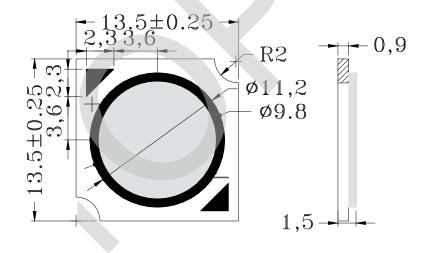



Unit: mm

Tolerance:  $\pm 0.25$ 



http://www.topliteusa.com Email:sales@toplightusa.com

## TECHNICAL DATA SHEET ATE-R10 <FOR TOPLITE COB MODULE>

2/9

## 3. PERFORMANCE PARAMETERS

### 3-1. ABSOLUTE MAXIMUM RATINGS

ITEM	SYMBOL	RATING	UNIT
Power Dissipation	P	11.7	W
Forward Current	$I_{\mathrm{F}}$	360	mA
Reverse Voltage	$V_R$	60	V
Operating Temperature	$T_{opr}$	- 30 ~ +80	$^{\circ}$
Storage Temperature	$T_{stg}$	- 40 ~ + 100	$^{\circ}$
Junction Temperature	$T_{jmax}$	110	$^{\circ}$

#### Note:

<sup>\*1.</sup> Forward Current allows maximum surge current ≤ 10ms.

<sup>\*2.</sup> Power dissipation and forward current are the values when the LED is used within the range of the derating curve in this data sheet.



http://www.topliteusa.com Email:sales@toplightusa.com

## TECHNICAL DATA SHEET ATE-R10 <FOR TOPLITE COB MODULE>

3/9

#### 3-2. ELECTRICAL-OPTICAL CHARACTERISTICS

 $(T_c=25^{\circ}C)$ 

*	**	PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
		Forward Voltage *1	$V_{\rm F}$	I —100 A	33.6	36	39.6	V
com	ımon	Beam Angle	Deg	$I_F=180$ mA	_	120	_	Deg
	**	Color Temp.	Тс		2870	3045	3220	K
	**	Color Rendering Index *3	Ra		80	_	_	_
***	***	Luminous Flux *2	Φ	I 100 A	590	615	_	lm
W	$\mathbf{W}_1$	Luminous Efficiency	η	$I_F=180\text{mA}$	91	95	_	lm/W
	W	Luminous Flux *2	Φ		622	648	_	lm
	$W_2$	Luminous Efficiency	η		96	100	_	lm/W
	**	Color Temp.	Tc		4745	5028	5311	K
	**	Color Rendering Index *3	Ra		80	_	_	_
D	D	Luminous Flux *2	Φ	I 100 A	648	680	_	lm
D	$D_1$	Luminous Efficiency	η	$I_F=180\text{mA}$	100	105	_	lm/W
	D	Luminous Flux *2	Φ		687	712	_	lm
	$D_2$	Luminous Efficiency	η		106	110	_	lm/W
	**	Color Temp.	Tc		6020	6530	7040	K
	**	Color Rendering Index *3	Ra		80		_	_
C		Luminous Flux *2	Φ	I 100 A	680	712		lm
	$C_1$	Luminous Efficiency	η	$I_F=180$ mA	105	110		lm/W
		Luminous Flux *2	Φ		720	745	_	lm
	C <sub>2</sub>	Luminous Efficiency	η		101	115	_	lm/W

(Note) Parameters is formulated based on shipping samples

<sup>\*1.</sup> After 20 ms drive, Measurement tolerance: ± 3 %

<sup>\*2.</sup> Monitored by Toplight's 1 m integrating sphere, after 20 ms drive, Measurement tolerance:  $\pm$  10 %

<sup>\*3.</sup> Monitored by Toplight's 1 m integrating sphere, after 20 ms drive, Measurement tolerance:± 2




http://www.topliteusa.com Email:sales@toplightusa.com


## TECHNICAL DATA SHEET ATE-R10 <FOR TOPLITE COB MODULE>


4/9


## 3-3. Characteristics diagram (TYP.)

Forward Current Vs.Relative Luminous Flux

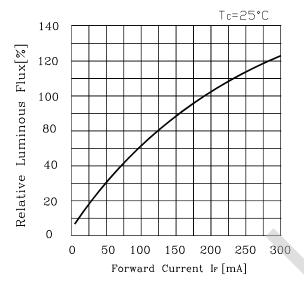

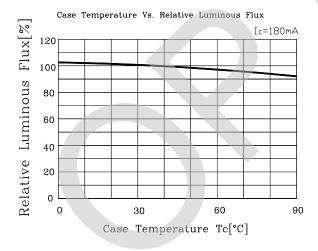

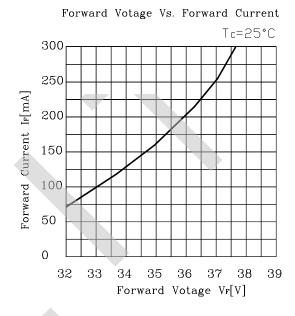

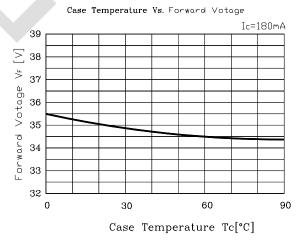



http://www.topliteusa.com Email:sales@toplightusa.com

# TECHNICAL DATA SHEET ATE-R10 <FOR TOPLITE COB MODULE>

5/9

## 4. RELIABILITY

The reliability of products shall be satisfied with items listed below.

### 4-1. TEST ITEMS AND TEST CONDITIONS

NO.	TEST ITEM	TEST ITEM TEST CONDITIONS	
1	Continuous operation test	inuous operation test	
2	Low temperature storage	$T_a = -40^{\circ}C \times 1000 \text{ hours}$	PASS
3	High temperature storage	$T_a=100^{\circ}\text{C}\times1000 \text{ hours}$	PASS
4	Moisture resistance	T <sub>a</sub> =60°C, 90%RH for 1000 hours	PASS
5	Thermal shock	$T_a$ =-40°C×30minutes~100°C×30minutes, 100 cycle	PASS

## 4-2. FAILURE CRITERIA

NO.	PARAMETER SYMBOL		FAILURE CRITERIA	
1	Forward Voltage	$V_{\mathrm{F}}$	$V_F > Initial value \times 1.1$	
2	Luminous Flux	Φ	$\Phi < Initial value \times 0.7$	



http://www.topliteusa.com Email:sales@toplightusa.com

## TECHNICAL DATA SHEET ATE-R10 <FOR TOPLITE COB MODULE>

6/9

## 5. CHROMATICITY COORDINATES REGIONAL


#### 5-1. 3000K CHROMATICITY COORDINATES

(Tolerance:  $x,y \pm 0.005$ ) ( $I_F = 180 \text{mA}, T_c = 25 ^{\circ}\text{C}$ )

Damas		Chromaticity coordinates					
Range		NO.1	NO.2	NO.3	NO.4	CENTER	
	X	0.4562	0.4299	0.4147	0.4373	0.4338	
	y	0.4260	0.4165	0.3814	0.3893	0.4030	

<sup>\*</sup> The percentage of each rank in the shipment shall be determined by TOPLIGHT.

#### **Chromaticity Diagram**

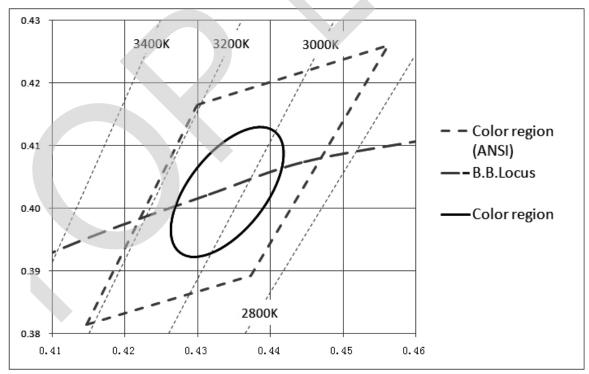

Note: The tolerance of measurement at our tester is VF±3% , Dv±10% , Chromaticity(x,y)±0.005.



http://www.topliteusa.com Email:sales@toplightusa.com

## TECHNICAL DATA SHEET ATE-R10 <FOR TOPLITE COB MODULE>

7/9


### 5-2. 5000K CHROMATICITY COORDINATES

(Tolerance:  $x,y \pm 0.005$ ) ( $I_F = 180 \text{mA}, T_c = 25 ^{\circ}\text{C}$ )

Dongo		Chromaticity coordinates					
Range		NO.1	NO.2	NO.3	NO.4	CENTER	
	X	0.3551	0.3376	0.3366	0.3515	0.3447	
	y	0.376	0.3616	0.3369	0.3487	0.3553	

<sup>\*</sup> The percentage of each rank in the shipment shall be determined by TOPLIGHT.

#### **Chromaticity Diagram**

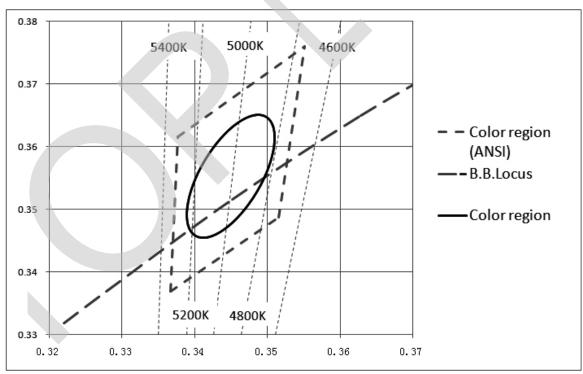

Note: The tolerance of measurement at our tester is  $VF\pm3\%$ ,  $Dv\pm10\%$ , Chromaticity(x,y) $\pm0.005$ .



http://www.topliteusa.com Email:sales@toplightusa.com

## TECHNICAL DATA SHEET ATE-R10 <FOR TOPLITE COB MODULE>

8/9


### 5-3. 6500K CHROMATICITY COORDINATES

(Tolerance:  $x,y \pm 0.005$ ) ( $I_F = 180 \text{mA}, T_c = 25 ^{\circ}\text{C}$ )

Dongs		Chromaticity coordinates					
Range		NO.1	NO.2	NO.3	NO.4	CENTER	
	X	0.3205	0.3028	0.3068	0.3221	0.3123	
	y	0.3481	0.3304	0.3113	0.3261	0.3238	

<sup>\*</sup> The percentage of each rank in the shipment shall be determined by TOPLIGHT.

#### **Chromaticity Diagram**

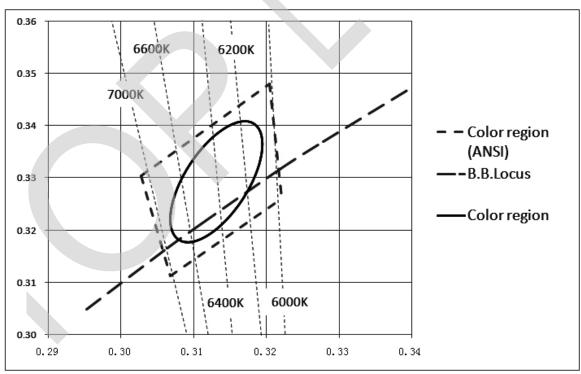

Note: The tolerance of measurement at our tester is  $VF\pm3\%$ ,  $Dv\pm10\%$ , Chromaticity(x,y) $\pm0.005$ .



http://www.topliteusa.com Email:sales@toplightusa.com

## TECHNICAL DATA SHEET ATE-R10 < FOR TOPLITE COB MODULE>

9/9

### 6. USE STANDARD & PRECAUTIONS

### Before use TOPLITE COB product, carefully read the specifications;

Handling with care for this product

Never touch the optical surface with finger or sharp object. The LED surface could be soiled or damaged, which could affect the optical performance of the LED.

Do not apply direct pressure on the optical surface.

Do not touch the resin with tweezers to avoid scratching or other damage.

In work environment, please keep handling the LEDs with appropriate ESD grounding. because this is a semiconductor product.

Please take adequate measures to prevent any static electricity being produced:such as the wearing of a wristband or anti-static gloves when handling this product.

