

SPECIFICATIONS

FOR TOPLITE COB MODULE

MODEL: ATE-R11-7W



TOPLITE

TOPLITE INTERNATIONAL LLC.


www.topliteusa.com





TECHNICAL DATA SHEET

ATE-R11-7W <TOPLITE COB MODULE>

1. PRODUCT APPEARANCE

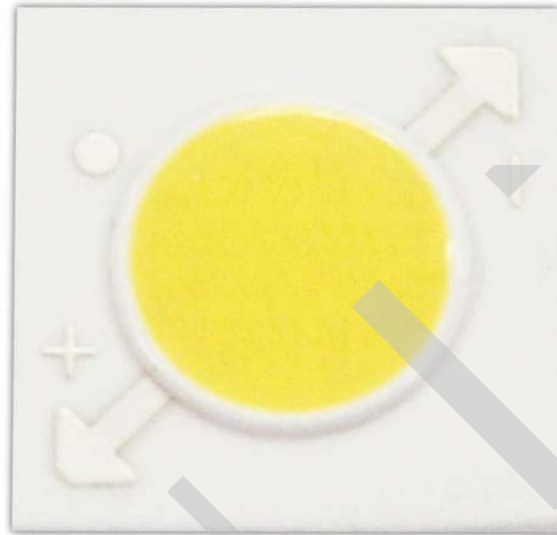

2. OUTLINE DRAWING

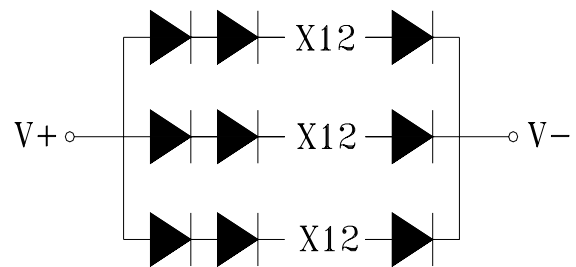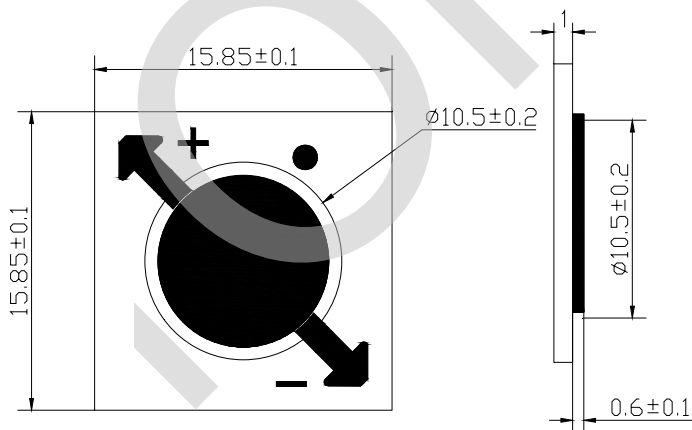

Unit: mm

Tolerance: ± 0.25

**TECHNICAL DATA SHEET****ATE-R11-7W** <TOPLITE COB MODULE>

2 / 8

3. PERFORMANCE PARAMETERS**3-1. ABSOLUTE MAXIMUM RATINGS**

ITEM	SYMBOL	RATING	UNIT
Power Dissipation	P	10.69	W
Forward Current	I _F	270	mA
Reverse Voltage	V _R	60	V
Operating Temperature	T _{opr}	- 30 ~ + 80	°C
Storage Temperature	T _{stg}	- 40 ~ + 100	°C
Junction Temperature	T _{jmax}	+ 125	°C

Note:

*1. Forward Current allows maximum surge current ≤ 10 ms.

*2. Power dissipation and forward current are the values when the LED is used within the range of the derating curve in this data sheet.



TECHNICAL DATA SHEET

ATE-R11-7W <TOPLITE COB MODULE>

3-2. ELECTRICAL-OPTICAL CHARACTERISTICS

(T_c=25°C)

**	PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	
common	Forward Voltage ^{*1}	V _F	I _F =190mA	34.8	36	39.6	V	
	Beam Angle	—		—	120	—	Deg	
W	** Color Temp.	—	I _F =190mA	2870	3045	3220	K	
	** Color Rendering Index ^{*3}	R _a		80	—	—	—	
	W ₁	Luminous Flux ^{*2}		Φ	578	612	—	lm
		Luminous Efficiency		η	85	90	—	lm/W
	W ₂	Luminous Flux ^{*2}		Φ	626	653	—	lm
		Luminous Efficiency		η	92	96	—	lm/W
D	** Color Temp.	—	I _F =190mA	4745	5028	5311	K	
	** Color Rendering Index ^{*3}	R _a		80	—	—	—	
	D ₁	Luminous Flux ^{*2}		Φ	653	687	—	lm
		Luminous Efficiency		η	96	101	—	lm/W
	D ₂	Luminous Flux ^{*2}		Φ	700	734	—	lm
		Luminous Efficiency		η	103	108	—	lm/W
C	** Color Temp.	—	I _F =190mA	6020	6530	7040	K	
	** Color Rendering Index ^{*3}	R _a		80	—	—	—	
	C ₁	Luminous Flux ^{*2}		Φ	714	734	—	lm
		Luminous Efficiency		η	105	108	—	lm/W
	C ₂	Luminous Flux ^{*2}		Φ	748	780	—	lm
		Luminous Efficiency		η	110	115	—	lm/W

(Note) Parameters is formulated based on shipping samples

*1. After 20 ms drive, Measurement tolerance: ± 3 %

*2. Monitored by TOPLITE's 1m integrating sphere, after 20 ms drive, Measurement tolerance: ± 10 %

*3. Monitored by TOPLITE's 1m integrating sphere, after 20 ms drive, Measurement tolerance:± 2




TECHNICAL DATA SHEET

ATE-R11-7W <TOPLITE COB MODULE>

3-3. Characteristics diagram (TYP.)


Forward Current Vs. Relative Luminous Flux

$T_c=25^{\circ}C$

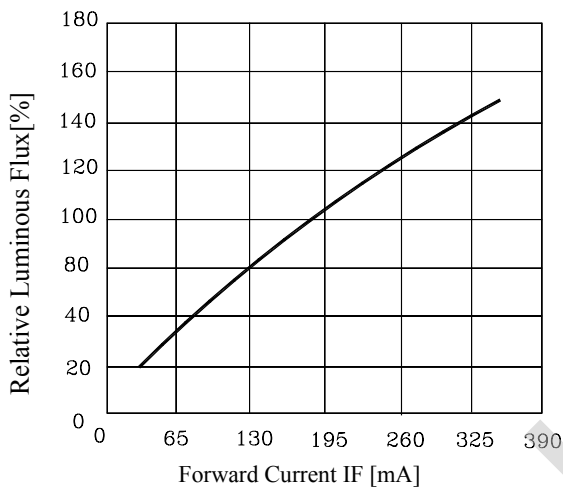


Forward Voltage Vs. Forward Current

$T_c=25^{\circ}C$

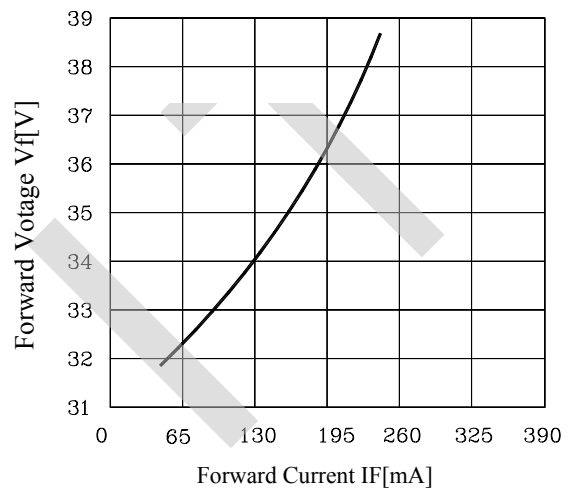


Case Temperature Vs. Relative Luminous Flux

$I_f=190mA$

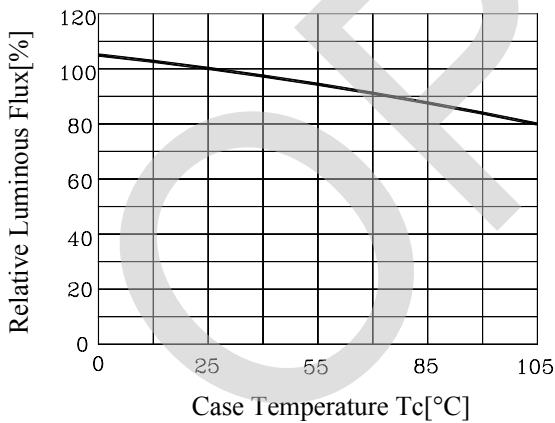

Case Temperature Vs. Forward Voltage

$I_f=190mA$

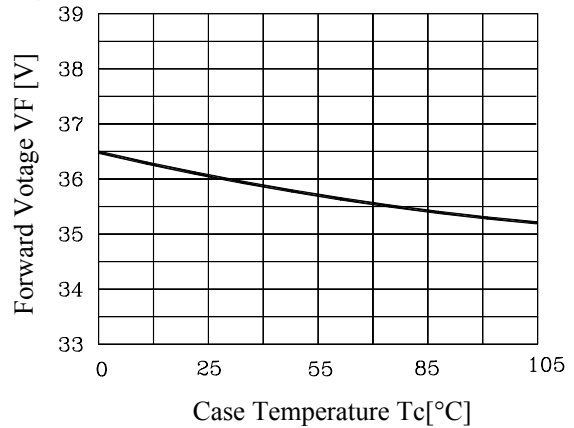

**TECHNICAL DATA SHEET****ATE-R11-7W** <TOPLITE COB MODULE>

5 / 8

4. RELIABILITY

The reliability of products shall be satisfied with items listed below.

4-1. TEST ITEMS AND TEST CONDITIONS

NO.	TEST ITEM	TEST CONDITIONS	RESULT
1	Continuous operation test	$T_a = 25^\circ\text{C}$, $I_F = 190\text{mA} \times 1000$ hours(with Al fin)	PASS
		$T_a = 80^\circ\text{C}$, $T_j = 120^\circ\text{C}$, $I_F = 190\text{mA} \times 1000$ hours(with Al fin)	
2	Low temperature storage	$T_a = -40^\circ\text{C} \times 1000$ hours	PASS
3	High temperature storage	$T_a = 100^\circ\text{C} \times 1000$ hours	PASS
4	Moisture resistance	$T_a = 60^\circ\text{C}$, 90%RH for 1000 hours	PASS
5	Thermal shock	$T_a = -40^\circ\text{C} \times 30$ minutes $\sim 100^\circ\text{C} \times 30$ minutes, 100 cycle	PASS

4-2. FAILURE CRITERIA

NO.	PARAMETER	SYMBOL	FAILURE CRITERIA
1	Forward Voltage	V_F	$V_F > \text{Initial value} \times 1.1$
2	Luminous Flux	Φ	$\Phi < \text{Initial value} \times 0.7$



TECHNICAL DATA SHEET

ATE-R11-7W <TOPLITE COB MODULE>

5. CHROMATICITY COORDINATES REGIONAL

5-1. 3000K CHROMATICITY COORDINATES


(Tolerance: $x,y \pm 0.005$)

($I_F = 190\text{mA}$, $T_c = 25^\circ\text{C}$)

Range	Chromaticity coordinates				
	NO.1	NO.2	NO.3	NO.4	CENTER
x	0.4562	0.4299	0.4147	0.4373	0.4338
y	0.4260	0.4165	0.3814	0.3893	0.4030

* The percentage of each rank in the shipment shall be determined by TOPLITE.

Chromaticity Diagram

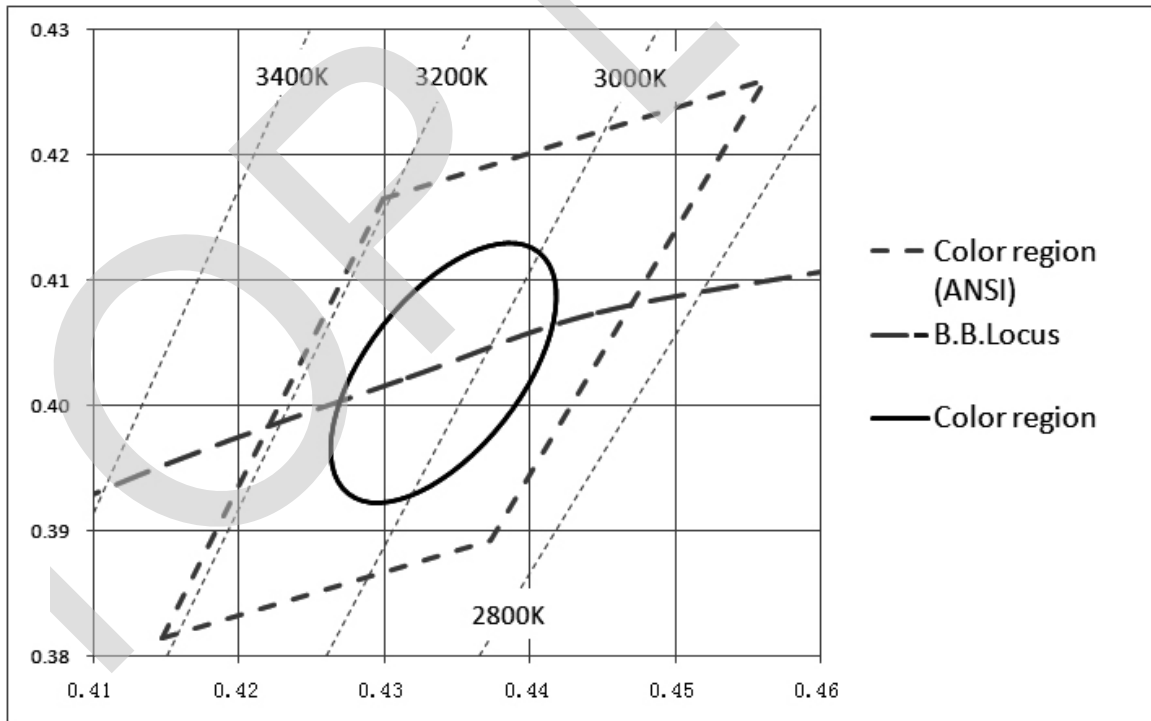

Note: The tolerance of measurement at our tester is $V_F \pm 3\%$, $D_v \pm 10\%$, Chromaticity(x,y) ± 0.005 .



TECHNICAL DATA SHEET

ATE-R11-7W <TOPLITE COB MODULE>

5-2. 5000K CHROMATICITY COORDINATES


(Tolerance: $x,y \pm 0.005$)

($I_F = 190mA, T_c = 25^\circ C$)

Range		Chromaticity coordinates				
		NO.1	NO.2	NO.3	NO.4	CENTER
	x	0.3551	0.3376	0.3366	0.3515	0.3447
	y	0.3760	0.3616	0.3369	0.3487	0.3553

* The percentage of each rank in the shipment shall be determined by TOPLITE.

Chromaticity Diagram

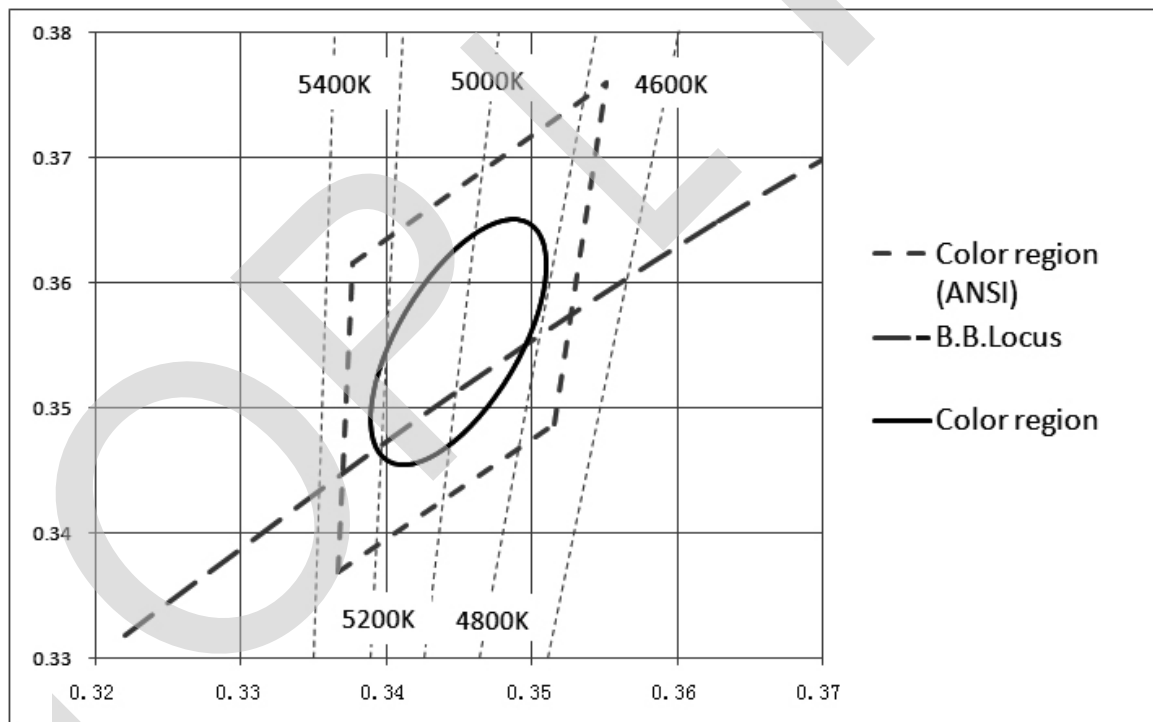

Note: The tolerance of measurement at our tester is $V_F \pm 3\%$, $D_v \pm 10\%$, Chromaticity(x,y) ± 0.005 .



TECHNICAL DATA SHEET

ATE-R11-7W <TOPLITE COB MODULE>

5-3. 6500K CHROMATICITY COORDINATES


(Tolerance: $x,y \pm 0.005$)

($I_F = 190\text{mA}$, $T_c = 25^\circ\text{C}$)

Range		Chromaticity coordinates				
		NO.1	NO.2	NO.3	NO.4	CENTER
	x	0.3205	0.3028	0.3068	0.3221	0.3123
	y	0.3481	0.3304	0.3113	0.3261	0.3238

* The percentage of each rank in the shipment shall be determined by TOPLITE.

Chromaticity Diagram

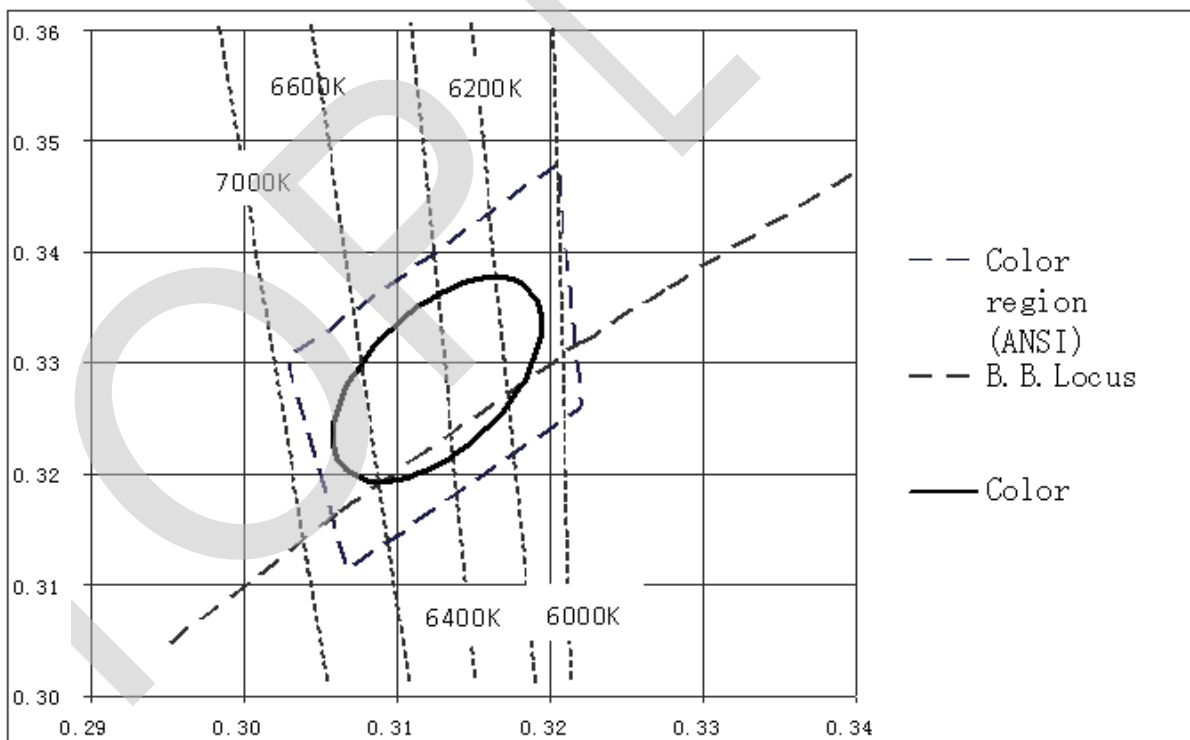

Note: The tolerance of measurement at our tester is $V_F \pm 3\%$, $D_v \pm 10\%$, Chromaticity(x,y) ± 0.005 .