

Φ3MM / 8×8 /1.1 INCH (28MM) SUPER RED / PURE GREEN DOT MATRIX

A-1088DPGR

FEATURES

- ※ 1.1 inch (28.0mm) matrix height.
- ※ Low power requirement, solid state reliability.
- ※ Multicolor available, stackable horizontally.
- ※ Categorized for luminous intensity.
- ※ Easy mounting on P.C. boards.
- ※ Remain within RoHS compliant version.

APPLICATION

- ※ Digital readout display
- ※ Instrument panels
- ※ Elevator
- ※ Audio equipment

Ordering Information

Part Number	Emission Color	Face Color	Bin Code	Luminous Intensity IV (μcd) (IF=10mA)		
				Min.	Typ.	Max.
A-1088DPGR	Prue Green Super Red	Black	T	26326	32907	39489
			U	39490	49362	59235
			V	59236	74045	88854

Maximum Ratings

Parameter	Symbol	Value	Unit
Operating temperature	T_{OP}	-35 ~ 85	°C
Storage temperature	T_{STG}	-35 ~ 85	°C
Forward current ($T_A=25\text{ °C}$)	I_F	30	mA per seg
Peak forward current ($T_A=25\text{ °C}$) *1	I_{PF}	120	mA per seg
Reverse voltage ($T_A=25\text{ °C}$)	V_R	5	V per seg
Power consumption ($T_A=25\text{ °C}$)	P	80	mW per seg

*1 at 1/10 Duty Cycle

Electrical / Optical Characteristics (1)

($T_A = 25\text{ °C}$)

Parameter	Symbol	Value	Unit	
Wavelength at peak emission PG(Typ.)	λ_P	525	nm	
Wavelength at peak emission R(Typ.)	λ_P	628		
Dominant wavelength IF = 20mA (Typ.)	λ_D	-	nm	
Spectral bandwidth at 50% IF = 20mA PG(Typ.)	$\Delta\lambda$	30	nm	
Spectral bandwidth at 50% IF = 20mA R(Typ.)	$\Delta\lambda$	20	nm	
Viewing angle at 50% IF = 20mA (Typ.)	$2\theta_{1/2}$	-	degree	
Forward voltage IF = 20mA	PG(Min.)	V_F	2.8	V
	PG(Typ.)	V_F	3.2	V
	PG(Max.)	V_F	3.5	V
Forward voltage IF = 20mA	R(Min.)	V_F	1.8	V
	R(Typ.)	V_F	2.1	V
	R(Max.)	V_F	2.4	V
Reverse current VR = 5V (Max.)	I_R	20	μA	
Optical efficiency IF = 20mA (Typ.)	η_{OPT}	-	lm/W	

Luminous Intensity Bin Groups


($T_A = 25\text{ °C}$ & $I_F = 10\text{ mA}$)

Bin Code	Luminous Intensity I_v (μcd)		
	Min.	Typ.	Max.
T	26326	32907	39489
U	39490	49362	59235
V	59236	74045	88854


Email: sales@toplightusa.com

TOP LIGHT USA


Electrical/Optical Charateristic (2)

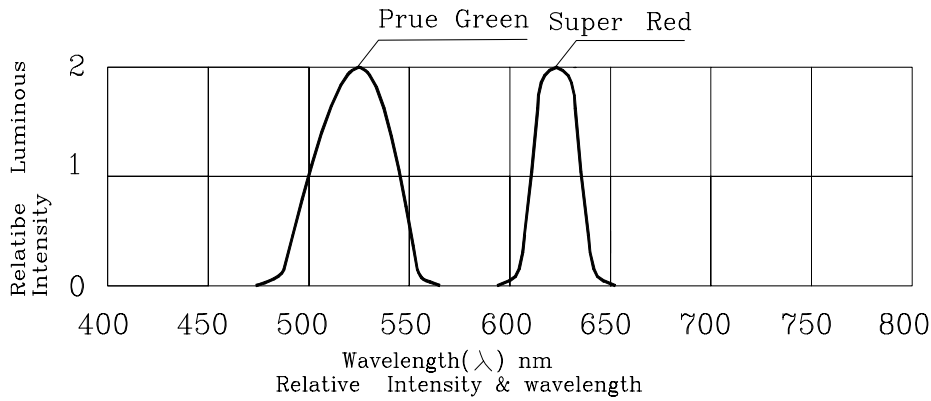


FORWARD CURRENT VS FORWARD VOLTAGE

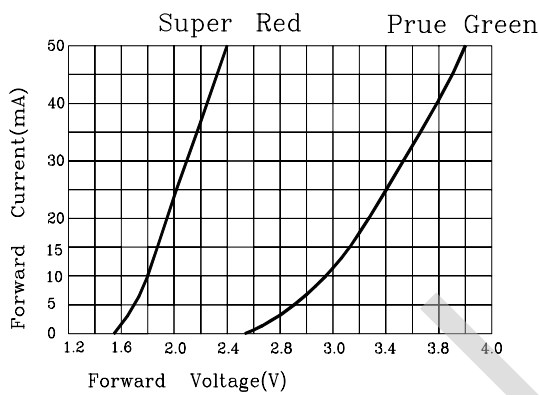


RELATIVE INTENSITY VS FORWARD CURRENT

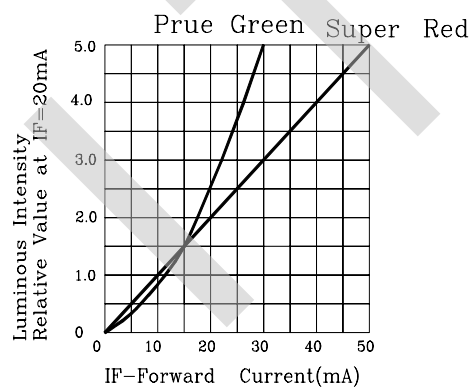



FORWARD CURRENT VS DERATING CURVE

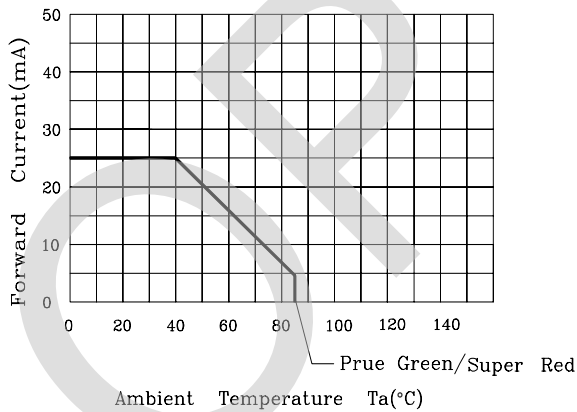

LUMINOUS INTENSITY VS AMBIENT TEMPERATURE

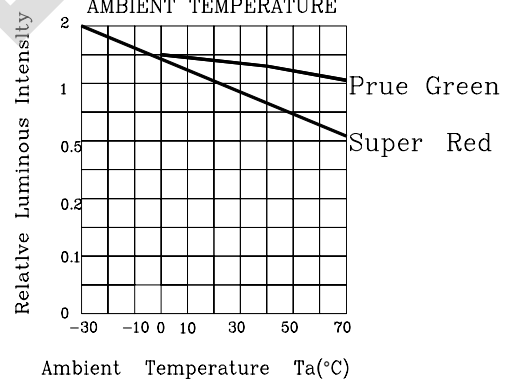

Package Outline Dimensions

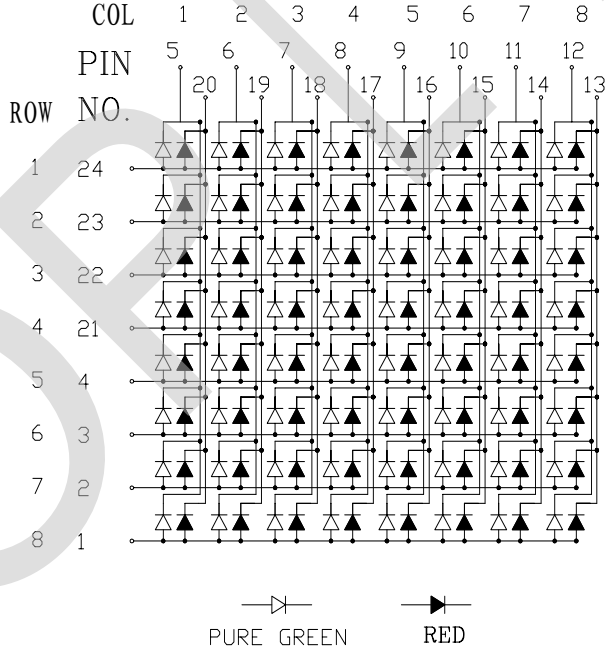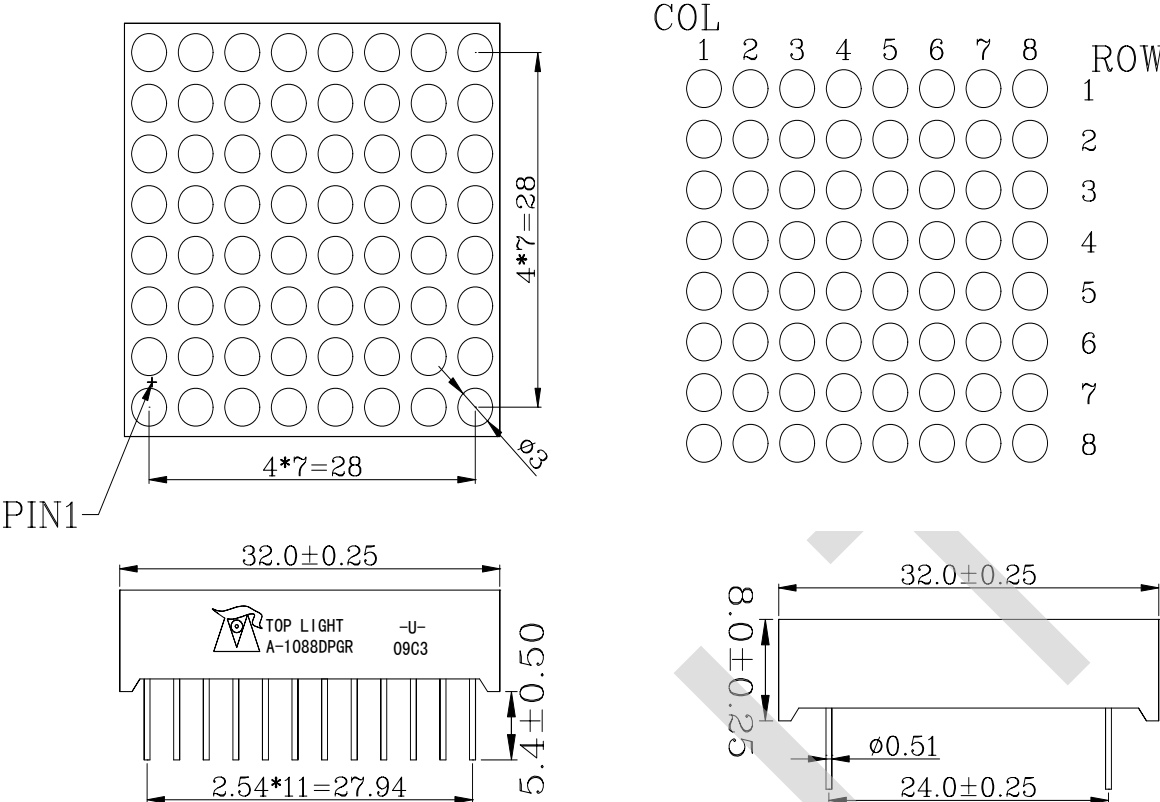

Notes:

1. All dimensions are in millimeters. Tolerance is +/-0.25 unless otherwise noted.
2. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

Display Soldering Conditions

The recommended conditions for soldering are as follows. Because the component is made with epoxy resin, the units are susceptible to heat. Therefore, the preheating and soldering temperatures should be kept as low as possible to avoid damage.


1 . Manual Soldering Conditions(with 1.5mm Iron tip)

Iron Tip Temperature: 350°C Max, Time: 3s Max

Position: The iron should be situated at least 2mm away from the root of the leads.

2 . Through the Wave Soldering Conditions

Wave Soldering Profile For Lead-free Through-hole LED

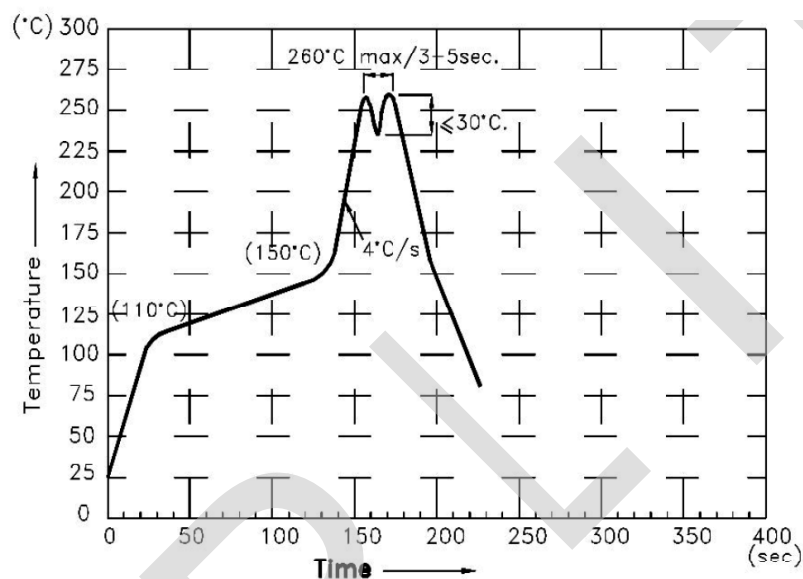

3 . Soldering General Notes:

- Toplight recommend manual soldering to be used only for repair and rework purposes. The soldering iron should not exceed 30W in power. The tip of the soldering iron should not touch the reflector case to avoid heat-damage.
- Maintain the pre-heat and peak temperatures with dip units as low as possible and the times as short as is feasible, since the products are susceptible to heat during flow soldering.
- After soldering, allow at least three minutes for the component to cool to room temperature before further operations.
- If components will undergo multiple soldering processes, or other processes where the components may be subjected to intense heat, please check with Toplight for compatibility.

Published by
 Toplight International LLC
 12 Key Largo, Aliso Viejo, CA 92656, USA
 © All Rights Reserved